


Latch Assembly for Club Kennels

**Hardware Kit
38900128**

For questions about this product, or for parts inquiries, please contact our
Customer Service Center listed below.

1. Place the top of the slam latch 32-5/8" from the bottom of the panel. Mark the holes for drilling purposes. Drill (2) holes to fit a 5/16" bolt. Install the Slam Latch with (2) 5/16" x 1 3/4" bolts and (2) 5/16" nuts (provided).
2. Place the bottom of the catch plate approximately 28 1/2" from the bottom of the door frame. Be sure the catch is positioned properly in the latch. Mark the hole for drilling purposes. Drill a hole to fit a 5/16" bolt. Install the Catch Plate with (1) 5/16" x 1 3/4" bolt and 5/16" nut.

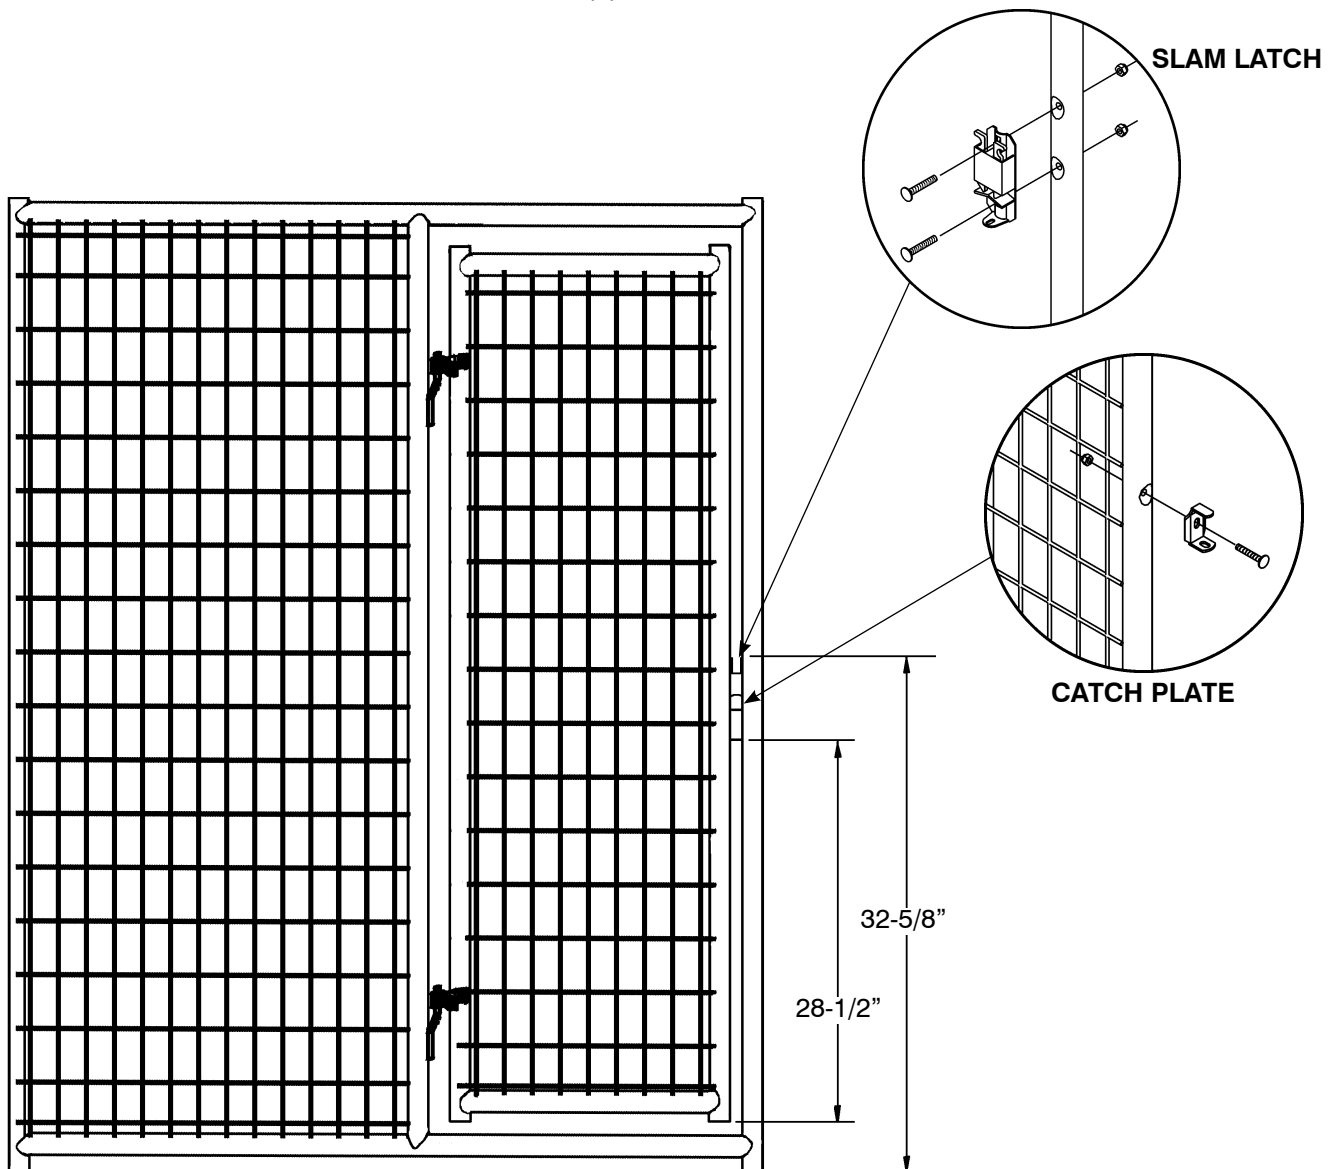

**Behlen[®]
COUNTRY**

CUSTOMER SERVICE CENTER

PO Box 569
Columbus, NE
68602-0569

Ph: 800-447-2751
Fax: (402) 563-7447
www.behlencountry.com